




PLC control touch screen panel



Platform in / out movement
(Pad clean underneath)



Auto pad clean

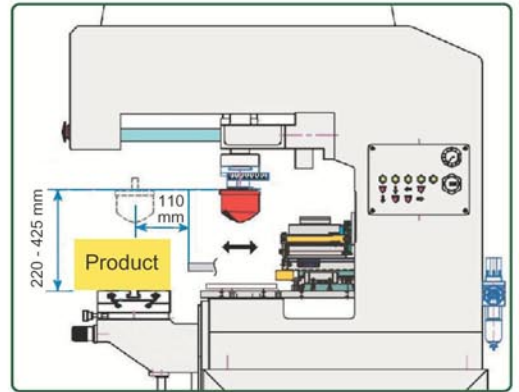

Maximum space for product/image with
advantage of auto pad clean function

FEATURES

- Single color automatic pad printer
- Rigid aluminium cast machine frame
- Platform in/out movement
- Pneumatic power machine operation
- Use sealed ink cup system
- Able to use laser engraved **Green plate**, thin steel plate, 10 mm steel plate and polymer plate
- Dead-on printing plate registration for quick job change
- PLC control touch screen panel
- Automatic pad clean with programmable cleaning cycle
- Pad stroke & speed adjustment
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

SPECIFICATIONS

Ink cup size :	Ø125 mm
Printing plate size :	150 x 300 mm
Max. speed : (dry cycle) *	900 / hr.
Pad cylinder :	Ø63 x 125 mm
Pad compression :	1,870N
Pad carriage stroke (in/out) :	197 mm
Power :	110/220V
Air consumption :	230 litre/min. (approx.)
Accuracy +/- :	0.05 mm
Size : (L x W x H)	966 x 810 x 1,560 mm
Weight :	180 kg (approx.)

*Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.